




Ficha técnica kit de inyección secuencial 4CYL – GLP

EQUIPO INYECCIÓN SECUENCIAL 5TA GENERACIÓN GLP GASCONVER



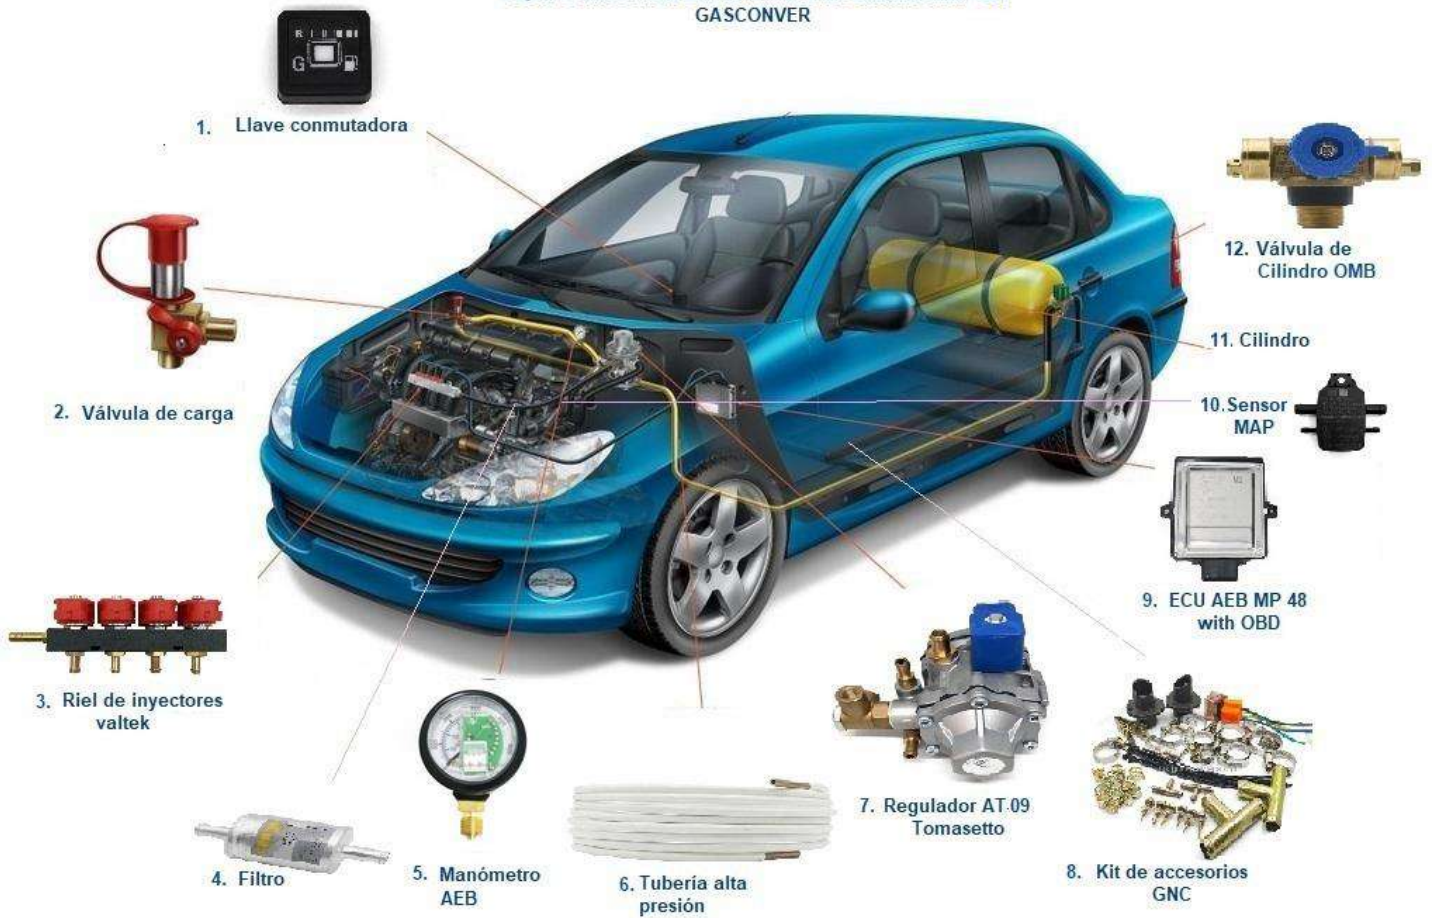




Listado piezas kit 4 CYL GLP				
Item	Nombre del producto	Imagen	Descripción	Cantidad (und)
1	AEB MP 48 with OBD ECU Kits		(AEB System including cable, and software) operación temperature : -40 c° a 100°c, Suple Voltage: DC 12V, conector: Plug with O	1
2	CNG 4 CYL injector rail Valtek		valve 3 ohm , Voltage: 12 V, work pressure: 0,8- 2,5 bar, line-loop resistance, marca: valtek	1
3	AT - 09 reductor Tomasetto		working voltage: DC12 V, working pressure: gas inlet 3Mpa, Out pressure: 0-0,3 Mpa, Output flow: ≥ 28 kg/h, marca: tomasetto	1
4	High pressure tube		6 meter/ 6 mm/white/work pressure: 25 Mpa, carbon steel pipe	1
5	Filter		working pressure: 4,5 bar/ working temperatura: -40°C a 120°C / 12 mm/aluminium	1
6	CNG sequential hose		4 rolls(gas tube: 12*19*1000, jet tube 5*11*2000, vacuum tube 4*9*1750, water tube 8*14* 2000	1
7	CNG sparr parts		spare parts to fix car	1
8	Pressure gauge		Accuracy grade:2,5, output, signal:+-0,25V, Scale on the mater: 0-400 bar/ 6000psi,	1
9	Filling valve		Working pressure: 2,5 Mpa, Material: stainless steeln LPG refilling valve	1
9	ECU switch		Llave conmutadora o Switch	1



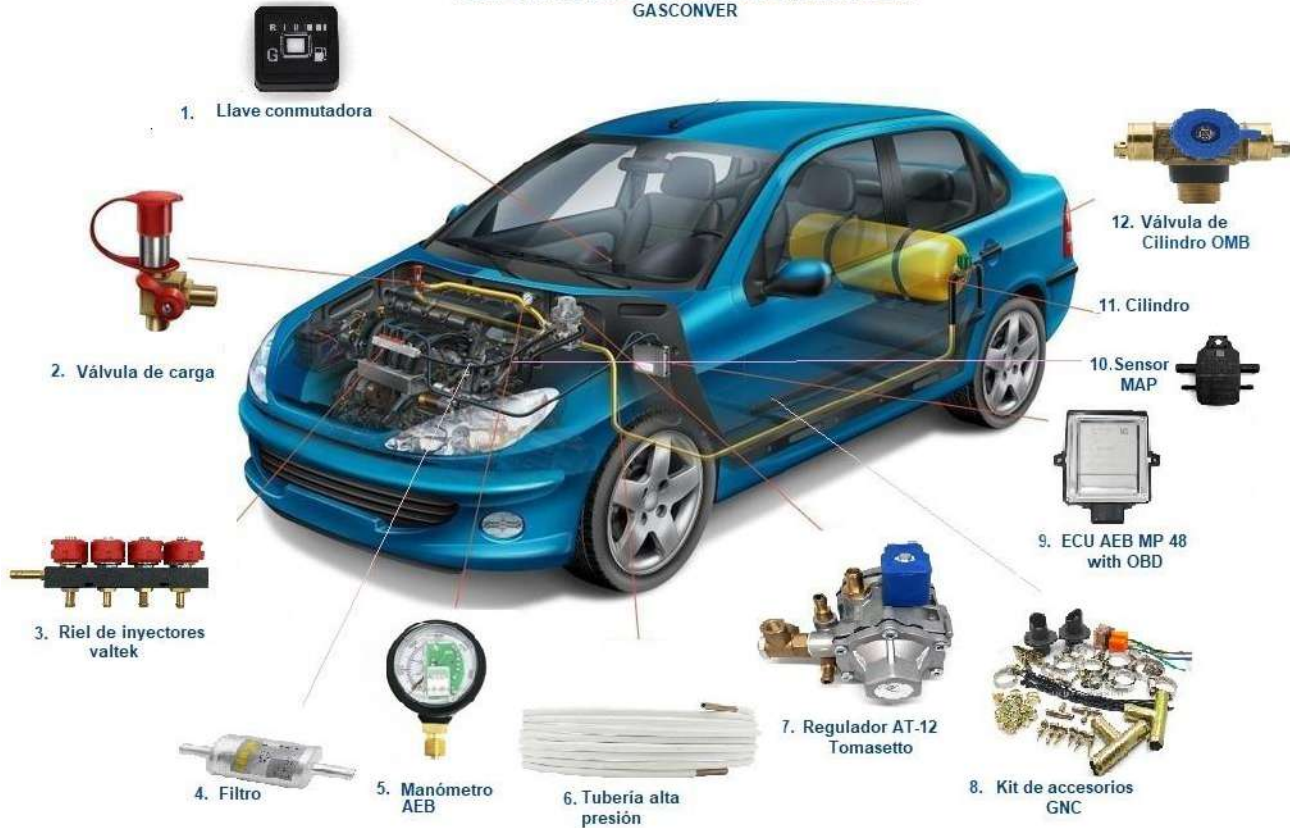


Imagen kits de conversión





EQUIPO INYECCIÓN SECUENCIAL 5TA GENERACIÓN GNC
GASCONVER





Item	Nombre del producto	Imagen	Descripción
1	High pressure tube		6 meter/ 6 mm/white/work pressure: 25 Mpa, carbon steel pipe, certificado ISO 15500
2	QF-T1H6 Filling valve		26Mpa/red/Connecting thread G1/2/gas outlet thread M12X1/open 90° counterclockwise
3	Switch AEB		Switch AEB
4	AEB MP 48 with OBD ECU Kits		(AEB System including cable, sensor map, temperature sensor and software)
5	AT - 12 reductor, Marca: Tomasseto		AT - 12 reductor, Marca: Tomasseto working voltage: DC12 V, working pressure: gas inlet 20Mpa, Out pressure: 0-0,3 Mpa, Output flow: ≥ 100 m3/h Pressure gauge: Accuracy grade: 2,5, output, signal: +0,25V, Scale on the mater: 0-400 bar/ 6000psi,
6	CNG 4 CYL injector rail, Marca: Valtek		valve 3 ohm , Voltage: 12 V, work pressure: 0,8-2,5 bar, line-loop resistance, marca: valtek
7	Filter		working pressure: 4,5 bar/ working temperatura: -40°C a 120°C / 12 mm/aluminium
8	CNG sequential hose		4 rolls(gas tube: 12*19*1000, jet tube 5*11*2000, vacuum tube 4*9*1750, water tube 8*14* 2000
9	CNG sparr parts		spare parts to fix car



